


DIN 6914 (ISO 7412)
EN 14399-4

TORNILLO HEXAGONAL
Métrico

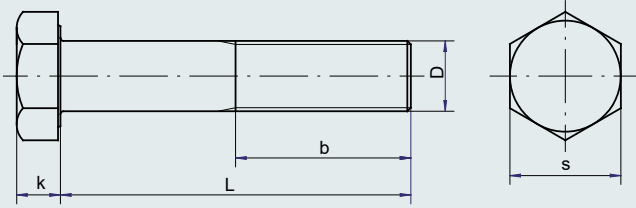

MATERIAL: ACERO

CALIDAD: 10.9

APLICACIÓN: Para uniones HV.

DIMENSIONES

Medida	M 12	M 16	M 20	M 22	M 24	M 27	M 30	M 36
Paso	1,75	2	2,5	2,5	3	3	3,5	4
b1)	21	26	31	32	34	37	40	48
b2)	23	28	33	34	37	39	42	50
k	8	10	13	14	15	17	19	23
s	22	27	32	36	41	46	50	60

L	Peso Kg 1000 piezas							
30	42,0							
35	52,0							
40	56,0	105						
45	59,0	113	180					
50	64,0	121	194	249				
55	68,0	129	207	264				
60	72,0	137	219	279	353			
65	77,0	145	232	294	371			
70	81,0	153	244	309	389	519		
75	86,0	157	257	324	407	542		
80	90,0	165	269	339	425	564		
85	95,0	173	282	354	443	587		
90	99,0	181	288	363	449	609		
95	104	189	301	378	467	632		
100		197	313	393	485	645		
105		205	326	408	503	666		
110		213	338	423	521	687		
115		221	351	438	539	708		
120		229	363	453	557	729		
125		237	376	468	575	750		
130		245	388	483	593	771		
135			400	498	611	792		
140			413	513	629	813		
145			425	528	647	834		
150			438	543	665	855		
160			450	573	700	897		
170					736	939		
180					772	981		
190					808	1020		
200						1060		